


YACHTS

PROFESSIONAL

ATTENTION, products announced by are subject to legislation and can be applied only by informed professionals.

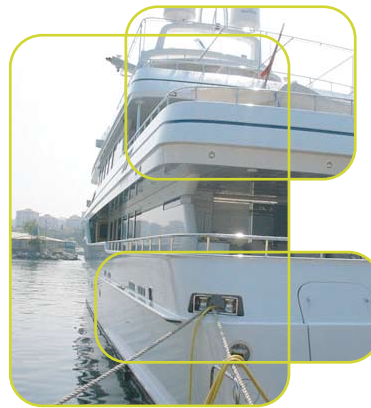

DATA N°28

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> <li>• 2 to 3 crossed coats of 35 to 40 dry microns</li> <li>• Theoretical spreading rate : 4,9 to 4,3 Sq.m/L for 70 to 80 dry microns</li> </ul>	PU 360	<p>FLEXIBLE ACRYLIC POLYURETHANE VARNISH J → TOPCOAT CLEAR PU 360 UVR <b>OPTION</b></p>
<ul style="list-style-type: none"> <li>• 2 to 3 crossed coats of 35 to 40 dry microns</li> <li>• Theoretical spreading rate : 5,3 to 4,6 Sq.m/L for 70 to 80 dry microns (depends color)</li> </ul>	PU 230	<p>FLEXIBLE ACRYLIC POLYURETHANE LACQUER I → TOPCOAT COLOR PU 320</p>
<ul style="list-style-type: none"> <li>• 1 coat of 25 dry microns</li> <li>• Theoretical spreading rate : 20,8 Sq.m/L for 25 dry microns</li> </ul>	EPU 221	<p>FLEXIBLE INTERCOAT EPOXY-URETHANE H → INTERFACE EPU 221 if 213 or 215 coat is ready to receive the lacque</p>
<ul style="list-style-type: none"> <li>• 1 coat of 70 to 80 dry microns</li> <li>• Theoretical spreading rate : 6,5 Sq.m/L for 80 dry microns</li> </ul>	PU 228 HB	<p>FLEXIBLE POLYURETHANE FILLER G → PORE FILLER PU 228 HB <b>OPTION</b> If 213 or 215 coat need a primer</p>
<ul style="list-style-type: none"> <li>• 2 coats of 120 dry microns</li> <li>• Theoretical spreading rate : EP 213 HB = 4,8 Sq.m/L for 120 dry microns EP 215 HB = 4,2 Sq.m/L for 120 dry microns</li> </ul>	EP 213 or 215 HB	<p>UNDERCOAT EPOXY PAINT F → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> <li>• 1 to 2 crossed coats of 250 to 300 dry microns</li> <li>• Theoretical spreading rate : 3,2 Sq.m/L for 300 dry microns</li> </ul>	SP 500	<p>FINISHING EPOXY FILLER E → SPRAYABLE FILLER 500</p>
<p>Practical spreading rate : 1l/Sq.m/mm of thickness</p>	100 300	<p>SOLVENT FREE EPOXY FILLER D → MIX FILL 100 and/or MIX FILL 300</p>
<ul style="list-style-type: none"> <li>• 1 coat of 30 to 40 dry microns</li> <li>• Theoretical spreading rate : 8,5 Sq.m/L for 40 dry microns</li> </ul>	EP 140	<p>ANTICORROSIVE PRIMER WITH CHROMAT C → AEROPRIM EP 140  </p>
<ul style="list-style-type: none"> <li>• 1 coat of 5 to 10 dry microns</li> <li>• Theoretical spreading rate : 6,2 Sq.m/L for 10 dry microns</li> </ul>	WP 110	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT B → AEROPRIM EP 140  </p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>		<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>		<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<ul style="list-style-type: none"> <li>• 1 coat of 5 to 10 dry microns</li> <li>• Theoretical spreading rate : 6,2 Sq.m/L for 10 dry microns</li> </ul>	EP 140	<p>ANTICORROSIVE PRIMER WITH CHROMAT B → AEROPRIM EP 140  </p>
<ul style="list-style-type: none"> <li>• 1 coat of 30 to 40 dry microns</li> <li>• Theoretical spreading rate : 8,5 Sq.m/L for 40 dry microns</li> </ul>	WP 110	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT C → AEROPRIM EP 140  </p>
<ul style="list-style-type: none"> <li>• 1 coat of 300 dry microns</li> <li>• Theoretical spreading rate : 3,3 Sq.m/L for 300 dry microns</li> </ul>	455	<p>UNDERCOAT EPOXY PAINT D → EPOXYGUARD 455</p>
<ul style="list-style-type: none"> <li>• 1 coat of 100 dry microns</li> <li>• Theoretical spreading rate : EP 213 HB = 5,7 Sq.m/L for 100 dry microns EP 215 HB = 5 Sq.m/L for 100 dry microns</li> </ul>	EP 213 or 215 HB	<p>UNDERCOAT EPOXY PAINT E → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> <li>• 1 coat of 75 dry microns</li> <li>• Theoretical spreading rate : 5 Sq.m/L for 75 dry microns</li> </ul>	MPO 500	<p>INTERCOAT VYNILIC PITCH (single component) F → UNDERCOAT MPO 500</p>
<ul style="list-style-type: none"> <li>• 2 to 3 coats of 75 dry microns</li> <li>• Theoretical spreading rate : 5 Sq.m/L for 75 dry microns</li> </ul>	MPO 500	<p>ANTIFOULING F → ISIS : ablative matrix antifouling paint</p>