


YACHTS

PROFESSIONAL

ATTENTION, products announced by are subject to legislation and can be applied only by informed professionals.

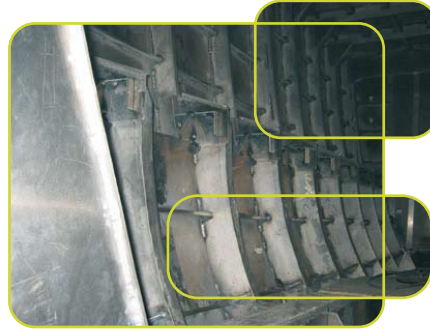

DATA
 N°32

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> • 1 coat of 100 dry microns • Theoretical spreading rate : EP 213 HB = 5,7 Sq.m/L for 100 dry microns EP 215 HB = 5 Sq.m/L for 100 dry microns 	<p>EP 213 or 215 HB</p>	<p>UNDERCOAT EPOXY PAINT D → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> • 1 coat of 30 to 40 dry microns • Theoretical spreading rate : 8,5 Sq.m/L for 40 dry microns 	<p>EP 140</p>	<p>ANTICORROSIVE PRIMER WITH CHROMAT C → AEROPRIM EP 140 </p>
<ul style="list-style-type: none"> • 1 coat of 5 to 10 dry microns • Theoretical spreading rate : 6,2 Sq.m/L for 10 dry microns 	<p>WP 110</p>	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT B → WASH PRIMER 110 </p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>		<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>		<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>
<ul style="list-style-type: none"> • 1 coat of 5 to 10 dry microns • Theoretical spreading rate : 6,2 Sq.m/L for 10 dry microns 	<p>WP 110</p>	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT B → WASH PRIMER 110 </p>
<ul style="list-style-type: none"> • 1 coat of 30 to 40 dry microns • Theoretical spreading rate : 8,5 Sq.m/L for 40 dry microns 	<p>EP 140</p>	<p>ANTICORROSIVE WHASH PRIMER WITH CHROMAT C → AEROPRIM EP 140 </p>
<ul style="list-style-type: none"> • 1 coat of 100 to 120 dry microns • Theoretical spreading rate : 4 Sq.m/L for 120 dry microns 	<p>550 or 560</p>	<p>FINISHING EPOXY GLOSS D → AEROXYGLASS 550 or 560</p>

Below waterline

Above waterline

* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL