




YACHTS

DATA N°37

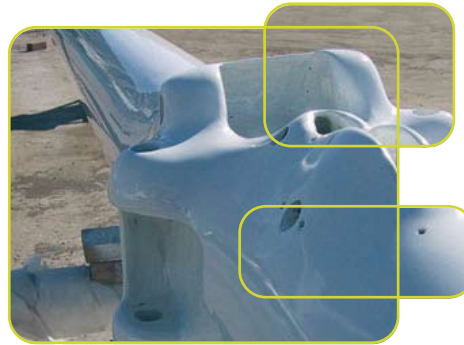

APPLICATIONS

PRODUCTS

<ul style="list-style-type: none"> <li>• 2 to 3 crossed coats of 35 to 40 dry microns</li> <li>• Theoretical spreading rate : 4,9 to 4,3 Sq.m/L for 70 to 80 dry microns</li> </ul>	<p>PU 360</p>	<p>FLEXIBLE ACRYLIC POLYURETHANE VARNISH I → TOPCOAT CLEAR PU 360 UVR <b>OPTION</b></p>
<ul style="list-style-type: none"> <li>• 2 to 3 crossed coats of 35 to 40 dry microns</li> <li>• Theoretical spreading rate : 5,3 to 4,6 Sq.m/L for 70 to 80 dry microns (depends color)</li> </ul>	<p>PU 230</p>	<p>FLEXIBLE ACRYLIC POLYURETHANE LACQUER H → TOPCOAT COLOR PU 320</p>
<ul style="list-style-type: none"> <li>• 1 coat of 25 dry microns</li> <li>• Theoretical spreading rate : 20,8 Sq.m/L for 25 dry microns</li> </ul>	<p>EPU 221</p>	<p>FLEXIBLE INTERCOAT EPOXY-URETHANE G → INTERFACE EPU 221 if 213 or 215 coat is ready to receive the lacque</p>
<ul style="list-style-type: none"> <li>• 1 coat of 70 to 80 dry microns</li> <li>• Theoretical spreading rate : 6,5 Sq.m/L for 80 dry microns</li> </ul>	<p>PU 228 HB</p>	<p>FLEXIBLE POLYURETHANE FILLER F → PORE FILLER PU 228 HB <b>OPTION</b> If 213 or 215 coat need a primer</p>
<ul style="list-style-type: none"> <li>• 2 coats of 120 dry microns</li> <li>• Theoretical spreading rate : EP 213 HB = 4,8 Sq.m/L for 120 dry microns EP 215 HB = 4,2 Sq.m/L for 120 dry microns</li> </ul>	<p>EP 213 or 215 HB</p>	<p>UNDERCOAT EPOXY PAINT E → UNDERCOAT EP 213 or 215 HB</p>
<p>Practical spreading rate : 1l/Sq.m/mm of thickness</p>	<p>100 300</p>	<p>SOLVENT FREE EPOXY FILLER D → MIX FILL 100 and/or MIX FILL 300</p>
<ul style="list-style-type: none"> <li>• 1 coat of 60 dry microns</li> <li>• Theoretical spreading rate : 8,3 Sq.m/L for 60 dry microns</li> </ul>	<p>EP 211</p>	<p>ANTICORROSIVE EPOXY PRIMER → EPOXY PRIMER EP 211</p>
<p>Metal cleaner treatment : spraying/rinsing/drying</p>	<p>Spats</p>	<p>A → METAL CLEANER or BLASTING SA 2- 1/2, SA 3</p>