




## RECOMMENDED SYSTEMS

STEEL HULL  
 EXTERIOR TREATMENT

**PLEASURE BOATS**  
**WITHOUT FILLER**  
**CLASSIC SYSTEMS**

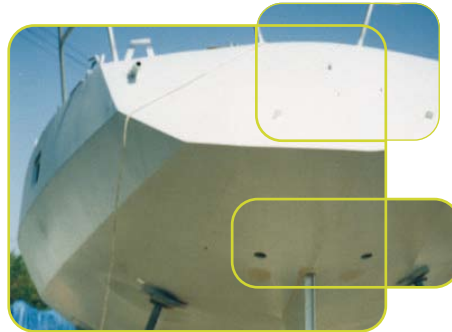

DATA  
**N°22**

## APPLICATIONS

## PRODUCTS

<p>PU 320 or PU 99 or PU 77</p> <ul style="list-style-type: none"> <li>• 2 to 3 crossed coats of 40 dry microns</li> <li>• Theoretical spreading rate :</li> </ul> <p>PU 320 = 4,6 Sq.m/L for 80 dry microns (depends on color)          PU 99 = 6,6 Sq.m/L for 80 dry microns (depends on color)          PU 77 = 6,5 Sq.m/L for 80 dry microns (depends on color)</p>	<p>PU 320 or PU 99 or PU 77</p>	<p><b>FLEXIBLE POLYURETHANE ACRYLIC LACQUER</b>          E<sup>1</sup> → TOPCOAT COLOR PU 320          or  <b>POLYESTER-POLYURETHANE LACQUER</b>          E<sup>2</sup> → POLYTOP PU 99          or  <b>ACRYLIC-POLYURETHANE LACQUER</b>          E<sup>3</sup> → POLYTOP PU 77</p>
<ul style="list-style-type: none"> <li>• 1 coat of 25 to 35 dry microns</li> <li>• Theoretical spreading rate : 14,9 Sq.m/L for 35 dry microns</li> </ul>	<p>EPU 221</p>	<p><b>FLEXIBLE INTERCOAT EPOXY-URETHANE</b>          D → INTERFACE EPU 221</p>
<ul style="list-style-type: none"> <li>• 3 coats of 120 dry microns</li> <li>• Theoretical spreading rate :</li> </ul> <p>EP 213 HB = 4,8 Sq.m/L for 120 dry microns          EP 215 HB = 4,2 Sq.m/L for 120 dry microns</p>	<p>EP 213 or 215 HB</p>	<p><b>UNDERCOAT EPOXY PAINT</b>          C → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> <li>• 1 coat of 60 to 80 dry microns</li> <li>• Theoretical spreading rate : 6,3 Sq.m/L for 80 dry microns</li> </ul>	<p>EP 211</p>	<p><b>ANTICORROSIVE EPOXY PRIMER</b>          B → EPOXY PRIMER EP 211</p>
<p>A → BLASTING TO SWEDISH STANDARD SA 2- 1/2, SA 3</p>		
<ul style="list-style-type: none"> <li>• 1 coat of 60 to 80 dry microns</li> <li>• Theoretical spreading rate : 6,3 Sq.m/L for 80 dry microns</li> </ul>	<p>EP 211</p>	<p><b>ANTICORROSIVE EPOXY PRIMER</b>          B → EPOXY PRIMER EP 211</p>
<ul style="list-style-type: none"> <li>• 3 to 4 coats of 120 to 130 dry microns</li> <li>• Theoretical spreading rate :</li> </ul> <p>EP 213 HB = 4,4 Sq.m/L for 130 dry microns          EP 215 HB = 3,8 Sq.m/L for 130 dry microns</p>	<p>EP 213 or 215 HB</p>	<p><b>UNDERCOAT EPOXY PAINT</b>          C → UNDERCOAT EP 213 or 215 HB</p>
<ul style="list-style-type: none"> <li>• 1 coat of 75 dry microns</li> <li>• Theoretical spreading rate : 5 Sq.m/L for 75 dry microns</li> </ul>	<p>MPO 500</p>	<p><b>INTERCOAT VYNILIC PITCH (single component)</b>          D → UNDERCOAT MPO 500</p>
<ul style="list-style-type: none"> <li>• 2 to 3 coats of 75 dry microns</li> <li>• Theoretical spreading rate : 5 Sq.m/L for 75 dry microns</li> </ul>		<p><b>ANTIFOULING</b>          E → GYPTIS : hard matrix antifouling paint          PROTIS : ablative matrix antifouling paint</p>

\* ALL OUR INFORMATION IS INDICATIVE AND NONCONTRACTUAL